(51) International Patent Classification 5 :		(11) International Publication Number:	**WO 93/17941**
B65D 90/44	**A1**	(43) International Publication Date:	16 September 1993 (16.09.93)

(21) International Application Number: PCT/GB93/00428

(22) International Filing Date: 2 March 1993 (02.03.93)

(30) Priority data:
9204758.8   5 March 1992 (05.03.92)   GB

(71) Applicant (for all designated States except US): CALOR AIR SEPARATION LIMITED [GB/GB]; Appleton Park, Slough, Berks SL3 9JG (GB).

(72) Inventor; and
(75) Inventor/Applicant (for US only) : PAGE, John, Kenneth, Rurik [GB/GB]; 16 Oaktree Way, Little Sandhurst, Camberley, Surrey GU17 8QS (GB).

(74) Agent: HYDE HEIDE & O'DONNELL; 10-12 Priest's Bridge, London SW15 5JE (GB).
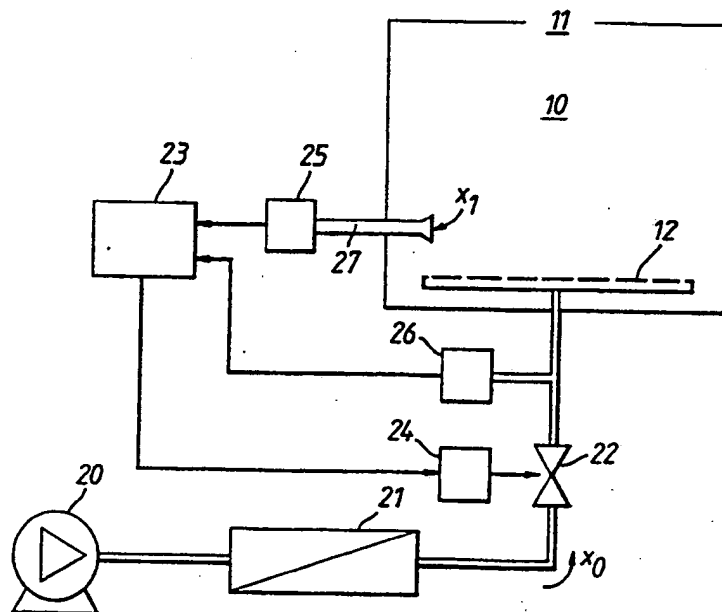
(81) Designated States: AU, CA, JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
    With international search report.
    With amended claims and statement.

(54) Title: METHOD AND APPARATUS FOR PURGING A CONTAINER

(57) Abstract

    A method of purging a critical component such as oxygen from a container is described by feeding purging gas into the container until the concentration of oxygen falls to a target level. The level of oxygen in the purging gas is reduced during purging in response to the concentration of oxygen in the container. The purging gas is applied via a gas separation device, the output composition of which is dependant on the gas flow rate therethrough and the concentration of oxygen in the purging gas is varied during purging by varying the gas flow rate through the gas separation device. So long as the level of oxygen in the container exceeds the target level, the level of oxygen in the purging gas is lower than in the container, and, during the initial portion of the purging process, is higher than the target value.

- 1 -

METHOD AND APPARATUS FOR PURGING A CONTAINER

The present invention relates to systems for purging a
critical component from containers and the like with gas,
generally an inert gas such as nitrogen.

A method of purging containers of a critical component such
as oxygen is known, in which a purging gas is fed into the
container and usually gas containing the critical component
is allowed to exit from the container, until the
concentration of the critical component falls to a target
level. There are many situations in which it is desirable
to purge a container which initially contains a normal
oxygen-containing atmosphere, by replacing that normal
atmosphere by one with a low oxygen concentration. One
class of examples includes tanks which contain flammable
fluids such as residual hydrocarbons or other oxidizable
materials; with these, it is necessary to reduce the oxygen
concentration to about 5%. Another class of examples is
containers for grains and other foodstuffs which may be
infested with insects or other pests. These can be
eliminated by purging with nitrogen to reduce the oxygen
level to about 1% to 2% for a controlled period. Such
treatment has been shown to be an effective alternative to
the use of chemical toxins, which can leave harmful residues
in or on the foodstuff.

Any convenient source of nitrogen can be used for such
purging. Liquid nitrogen and cylinders containing nitrogen
at high pressure are long-established sources. The pressure
swing absorption technique, using materials which
differentially absorb one of the components (generally
oxygen) from air under pressure and then release it when the
pressure is reduced, has also become established for certain

- 2 -

situations. Recently, membrane air separation systems, in which a membrane is used which is differentially permeable to different components of air, have also come into commercial use for some situations, including purging.

In selecting a nitrogen source for purging, a variety of factors such as the initial cost of the system, the running cost, the size and weight of the system, convenience of use, and the time taken for the purging all have to be considered. For many situations, the use of liquid or pressurized nitrogen is ruled out by the complexities of organising regular supplies. The use of a pressure swing absorption or a membrane air separation system is therefore indicated in many situations. Of these two systems, the latter is often preferable, as it is considerably simpler than a pressure swing absorption system (which involves the complications of cycling between two states, and often of using at least two vessels as well).

W th both the pressure swing absorption system and the r nbrane air separation, the bulk and capital cost of the s stem can be substantial, and will generally increase broadly proportionally as the desired flow rate of the purging gas is increased. In many situations, however, the purging rate must not be too slow, for cost, convenience, and/or other performance reasons.

It is an object of the present invention to maximise the purging rate achievable with a purging gas system of given size or other physical characteristics.

We have discovered that this objective can be achieved by controlling the composition of the purging gas during

- 3 -

purging, in response to the concentration of the critical component in the container.

Thus, according to a first aspect of the invention there is provided a method of purging a critical component from a container by feeding purging gas into the container until the concentration of the critical component falls to a target level, characterised in that the level of the critical component in the purging gas is varied during purging in response to the concentration of the critical component in the container.

According to a second aspect of the invention, there is provided an apparatus for purging a critical component from a container to a target level, comprising: i) means for feeding purging gas to the container; ii) means for measuring the concentration of the critical component in the container; and iii) control means for varying the concentration of the critical component in the purging gas in response to the measured concentration of the critical component in the container.

The apparatus may further comprise: iv) means for measuring the concentration of the critical component in the purging gas, said control means additionally being responsive to the measured concentration of the critical component in the purging gas.

Usually the critical component is oxygen although the method and apparatus according to the invention are equally applicable to the purging of other components, especially other gaseous components from containers. The purging gas will usually comprise, in addition to the critical component, an inert component such as nitrogen. Throughout

- 4 -

the following description, the critical component referred
to is oxygen, but it is to be understood that the
description applies equally to other critical components.

We prefer that, in a first phase of the purging process, the
level of oxygen in the purging gas is lower than the level
of oxygen in the container, so long as the level of oxygen
in the container exceeds the target level and ideally that,
during at least a portion of the purging process, the level
of oxygen in the purging gas is higher than the target
value. This can be achieved in a preferred embodiment of
the invention, when the concentration of oxygen in the
purging gas is reduced during purging. Once the level of
oxygen in the purging gas falls to the target value, the
second phase of the process is reached in which the level of
oxygen in the purging gas is set at or below the target
value. Once the level of oxygen in the container reaches
the target value, the level of oxygen in the purging gas may
then be maintained at a level such as to maintain the target
level in the container. In an ideal situation, this will
mean maintaining the oxygen level of the purging gas at the
target value. However, in a situation where leakage into
the container occurs, for example leakage of air, it may be
necessary to maintain the level of oxygen in the purging gas
below the target value.

Thus, the control means may be programmed to set the
concentration of oxygen in the purging gas (x_0) in
response to the concentration of oxygen in the container
(x_1) and the target level (x_t) according to the formula

$$x_O = (x_1 - a),$$

so long as

$$x_O > x_t$$

where "a" has a positive value. Usually, the value of "a" is a constant during at least one portion of the purging process.

In the second phase where the concentration of oxygen in the container (x_1) still lies above the target level (x_t), the control means may be programmed to set the concentration of oxygen in the purging gas (x_O) in response to the concentration of oxygen in the container (x_1), according to the formula

$$(x_1 - a) \leq x_O \leq x_t.$$

In the third phase, the control means may be programmed to set the concentration of oxygen in the purging gas (x_O) in response to the concentration of oxygen in the container (x_1) and the target level (x_t) according to the formula

$$x_O \leq x_t,$$

as soon as

$$x_1 = x_t.$$

In more sophisticated embodiments, the concentration of oxygen in the purging gas (x_O) may be set in response to the rate of change of the concentration of oxygen in the container (x_1).

- 6 -

The means for feeding purging gas to the container
preferably comprises a gas separation device, such as a
membrane separator, the output composition of which is
dependant on the gas flow rate therethrough. The means for
varying the concentration of the purging gas may then
comprise means for varying the flow rate of gas through the
membrane separator. Thus, the concentration of oxygen in
the purging gas is then be varied during purging by varying
the gas flow rate through the gas separation device. It is
a characteristic of certain purging gas systems (including
in particular membrane air separation systems) that the gas
flow rate and the composition of the output gas can readily
be controlled, with the gas flow rate being approximately
inversely related to the output gas composition (or more
precisely the nitrogen content of the output gas). In such
systems, the application of the invention enables the time
required to achieve purging to be decreased by suitably
controlling these variables during purging, with the purge
gas flow rate being initially high and the nitrogen
concentration being below that required, and the purge gas
flow rate being reduced and the nitrogen concentration being
increased as purging proceeds.

The invention is particularly advantageous where the
container has an internal structure or arrangement of void
space which allows significant mixing of the injected purge
gas with the atmosphere being displaced, e.g. air.

While not wishing to be bound by theory, it is believed that
the benefit of the invention can be explained as follows, in
the case where the critical gas is oxygen and is supplied by
a gas separator or the like, the output concentration of
which is a function of the gas flow rate therethrough:

- 7 -

If purge gas is fed in at the target oxygen concentration from the beginning, this produces a high oxygen concentration gradient in the container. This results in a high diffusion flow of oxygen, which is equivalent to a high degree of mixing between the original normal or near normal air and the low oxygen purge gas. According to the invention the oxygen concentration gradient is kept low, so that the degree of mixing is low and the effect just noted is minimized. In addition, the purge gas flow rate is initially considerably higher (until the oxygen concentration approaches the target level), so that the rate of displacement of the normal or near normal air is correspondingly increased. The overall result is that the purge time (i.e. the time to reach the target oxygen concentration substantially throughout the container) is considerably reduced, as noted above.

The high initial purge gas flow rate of the present system has another important advantage. In some large containers, it is possible for inversion to occur, resulting eg from heating of parts of the container by sunlight, with undesirable results (eg mass flow of the normal or near-normal air to the bottom of the container and of the low oxygen gas to the top of the container and its subsequent displacement out of the container). The chance of such inversion effects is considerably reduced if the flow rate of the purging gas is relatively high.

A purge system embodying the invention will now be described, by way of example, with reference to the drawings, in which:

Fig 1 is a block diagram of the purge system applied to a container; and

- 8 -

Fig 2 is a graph showing the operation of the purge system.

Referring to Fig. 1, a container 10 has a vent 11 at its top
and a purge gas inlet system 12 at its bottom. The
container may contain some form of goods (not shown). A
compressor 20 supplies air under pressure to a membrane air
separation unit 21, in which oxygen diffuses away
differentially, producing a nitrogen-enriched output gas,
which is fed through a needle valve 22 to the purge gas
inlet system 12 at the bottom of the container 10.

To implement the strategy of the present invention, the
valve 22 is controlled to allow a high initial purge gas
flow rate and then to progressively reduce the flow rate
until a target concentration of nitrogen is achieved over a
substantial proportion of the container.
The valve 22 is controlled by a control unit 23 via an
actuator 24. The system includes two oxygen concentration
sensors, 25 and 26, the first of which senses the oxygen
concentration at a suitable point in the container 10 by
means of an intake 27 and the second of which senses the
oxygen concentration in the purge gas from the valve 22.
These two sensors feed the controller 23, which adjusts the
purge gas flow rate in dependence on their outputs. The
controller should have a high proportional band, preferably
in excess of 500%, in order to avoid "hunting" of the
control point in the air separator flow rate (and injected
oxygen level). The ideal proportional band will depend
inter alia on the position of the intake 27 and the volume
of the container. The further this intake is from the inlet
system 12, and/or the larger the volume of the container,
the higher will be the ideal proportional band for the
controller. A suitable such controller is a West 2075

- 9 -

Controller ex West Instruments, Brighton, UK having a
proportional band of the order of 1000%.

It is possible to take a number of samples from the
container by, for example, arranging for two or more intakes
27 to be provided at the same horizontal level, and mixing
the sampled gas before analysis or by averaging the analysis
results. This helps to overcome the effects of the intake
27 being positioned in a dead space within the container.

The controller can conveniently operate as follows. For as
long as the purge gas oxygen content is greater than the
target oxygen content, the purge gas flow rate is adjusted
to maintain the oxygen content of the purge gas at a fixed
level below the oxygen content in the container (at the
sensor); then, when the oxygen content in the container
equals the target value, the purge gas oxygen content is
held at the container (and target) oxygen level. (The
pressures involved are all small compared with atmospheric,
so the oxygen concentrations can be taken indifferently as
absolute or relative.)

These operating conditions can be expressed symbolically as
follows. Take

x_O =   the oxygen concentration in the injected purge gas
            (as sensed by sensor 26)

x_1 =   the oxygen concentration in the gas in the
            container (as sensed by sensor 25)

x_t =   the target oxygen concentration.

a =   a constant.

- 10 -

Then

$$\text{IF } x_0 > x_t \text{ THEN SET } x_0 = (x_1 - a) \qquad (1)$$
$$\text{IF } x_1 = x_t \text{ THEN SET } x_0 = x_t \qquad (2)$$

An example of the operation of this system is shown in Fig. 2, which shows the purge gas oxygen content (PG O_2%) against time. The atmospheric oxygen content of 21% O_2 (+ 70% N_2) is shown as line 30. The purge gas oxygen content starts off at a high value (about 19%), which is reduced along a curve 31 during which $x_0 > x_t$ (i.e. condition (1) above applies). At about time t = 24, this condition ceases to apply, and $x_0 = x_t$ (i.e. condition (2) above applies), and from that time onwards, the oxygen content of the purge gas is kept constant at 5% (curve 32). In this example, the oxygen content of the container was reduced to 10% at time t = 80 (point 33). In contrast, the simple known strategy of having the oxygen content of the purge gas held steady at 5% for the whole time (curve 34) reduced the oxygen content of the container only as far as 18% by time t = 80 (point 35). After a further period of time, not shown in Figure 2, the oxygen content of the container x_1 reaches the target value of 5%. Thereafter, the purging gas oxygen content is maintained at 5% in order to maintain the container gas oxygen concentration at that level.

The test intake 27 is preferably located fairly low in the container 10, but far enough above the base of the container to make the effects of minor variations of the oxygen concentration insignificant and to allow reasonably accurate sensing of the oxygen gradient. The constant "a" is chosen to give an oxygen gradient which results in relatively high purge gas flow rates and relatively low diffusion mixing in the container.

- 11 -

Depending on the nature and purpose of the purge, the purge
system can be kept running either permanently (for as long
as the purge is to be maintained) or for a fixed time
thereafter (sufficient as determined eg by experience to
establish the target oxygen concentration throughout the
container).

The oxygen content of the purge gas can of course be
controlled in various ways. The precise control equations
used, i.e. the precise curve which the oxygen content is
caused to follow with time, can of course have more than two
segments, and each segment can be straight or curved
according to any convenient formula (e.g. quadratic or
exponential). Also, the time lengths of the segments and
the parameters of the curve in those segments can be
controlled in various ways. In the system above, the oxygen
concentrations in the purge gas and the container are
sensed, but other variables (eg the purge gas flow rate
and/or the quantity of material in the container) can be
sensed and used for control, or the curve may be
predetermined.

- 12 -

CLAIMS

1.   A method of purging a critical component from a container by feeding purging gas into the container until the concentration of the critical component falls to a target level, characterised in that the level of the critical component in the purging gas is varied during purging in response to the concentration of the critical component in the container.

2.   A method according to claim 1, wherein the concentration of the critical component in the purging gas is reduced during purging.

3.   A method according to claim 1 or 2, wherein the purging gas is supplied via a gas separation device, the output composition of which is dependant on the gas flow rate therethrough.

4.   A method according to claim 3, in which the concentration of the critical component in the purging gas is varied during purging by varying the gas flow rate through the gas separation device.

5.   A method according to any preceding claim, wherein the level of the critical component in the purging gas is lower than the level of the critical component in the container, so long as the level of the critical component in the container exceeds the target level.

6.   A method according to any preceding claim, wherein, during at least a portion of the purging process, the level of the critical component in the purging gas is higher than the target value.

- 13 -

7.   A method according to any preceding claim, wherein the critical component is oxygen.

8.   An apparatus for purging a critical component from a container to a target level, comprising:

i)   means for feeding purging gas to the container;

ii)   means for measuring the concentration of the critical component in the container; and

iii)   control means for varying the concentration of the critical component in the purging gas in response to the measured concentration of the critical component in the container.

9.   An apparatus according to claim 8, further comprising:

iv)   means for measuring the concentration of the critical component in the purging gas, said control means additionally being responsive to the measured concentration of the critical component in the purging gas.

10.   An apparatus according to claim 9, wherein said
control means is programmed to set the concentration of the
critical component in the purging gas (x_o) in response to
the concentration of the critical component in the container
(x_1) and the target level (x_t) according to the formula

$$x_o = (x_1 - a),$$

so long as

$$x_o > x_t$$

where "a" has a positive value.

11.   An apparatus according to claim 10, wherein said
control means is programmed to set the concentration of the
critical component in the purging gas (x_o) in response to
the concentration of the critical component in the container
(x_1) and the target level (x_t) according to the formula

$$(x_1 - a) \le x_o \le x_t,$$

so long as

$$x_1 > x_t.$$

12.   An apparatus according to claim 10 or 11, wherein
said control means is programmed to set the concentration of
the critical component in the purging gas (x_0) in response
to the concentration of the critical component in the
container (x_1) and the target level (x_t) according to
the formula

$$x_0 \leq x_t,$$

as soon as

$$x_1 = x_t.$$

13.   An apparatus according to claim 10 or 11, wherein
the value of "a" is a constant during at least one portion
of the purging process.

14.   An apparatus according to any one of claims 8 to
13, wherein the means for supplying purging gas to the
container includes a membrane separator.

15.   An apparatus according to claim 14, wherein the
means for varying the concentration of the purging gas
comprises means for varying the flow rate of gas through the
membrane separator.

1.   A method of reducing infestation in a container by
purging a critical component therefrom by feeding purging
gas into the container until the concentration of the
critical component falls to a target level, characterised in
that the level of the critical component in the purging gas
is varied during purging in response to the concentration of
the critical component in the container.

2.   A method according to claim 1, wherein the
concentration of the critical component in the purging gas
is reduced during purging.

3.   A method according to claim 1 or 2, wherein the
purging gas is supplied via a gas separation device, the
output composition of which is dependant on the gas flow
rate therethrough.

4.   A method according to claim 3, in which the
concentration of the critical component in the purging gas
is varied during purging by varying the gas flow rate
through the gas separation device.

5.   A method according to any preceding claim, wherein
the level of the critical component in the purging gas is
lower than the level of the critical component in the
container, so long as the level of the critical component in
the container exceeds the target level.

6.   A method according to any preceding claim, wherein,
during at least a portion of the purging process, the level
of the critical component in the purging gas is higher than
the target value.

STATEMENT UNDER ARTICLE 19

Claim 1 of the application has been amended to direct the invention to a method of reducing infestation in a container. A basis for this amendment can be found on page 1, second paragraph of the application as filed:

"Another class of examples is containers for grains and other
foodstuffs which may be infested with insects or other pests."

The International Search Report refers to WO91/11913 (The Broken Hill Proprietary Company Limited) which is concerned with the generation of controlled atmospheres for use in horticultural applications. Broken Hill makes no reference to the reduction of infestation in a container. The Broken Hill document is concerned only with respiring horticultural produce, such as fruit and vegetables. The present application is concerned with containers for foodstuffs such as grains, which are non-respiring. Broken Hill assumes perfect mixing in the container (see page 7, line 2), whereas the present invention is based on reducing the degree of mixing in the container - see page 7, first paragraph of the present application:

"According to the invention the oxygen concentration gradient
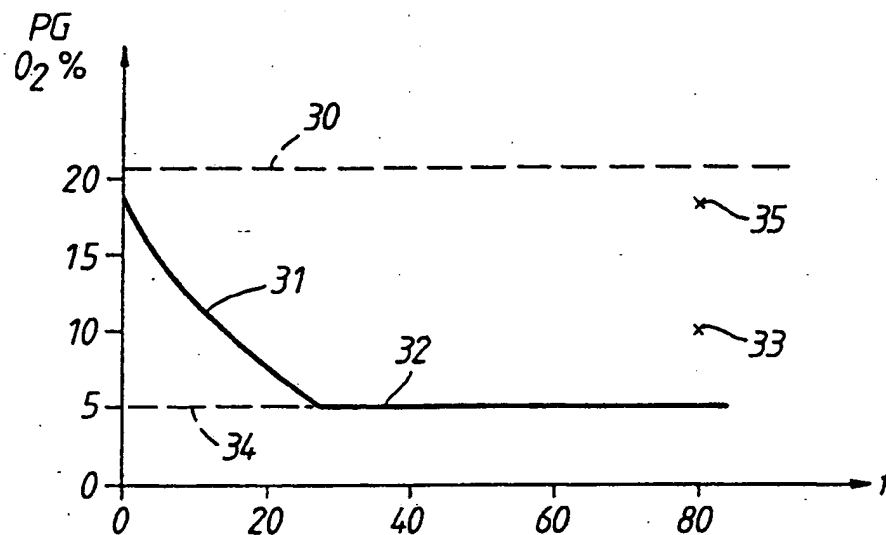is kept low, so that the degree of mixing is low....."

The Applicants submit therefore that their invention is both novel and involves an inventive step over the disclosures of Broken Hill.

The amendment to Claim 1 will necessitate corresponding amendment to the description, on page 3, paragraph 1.

Fig.1.

Fig.2.

INTERNATIONAL SEARCH REPORT
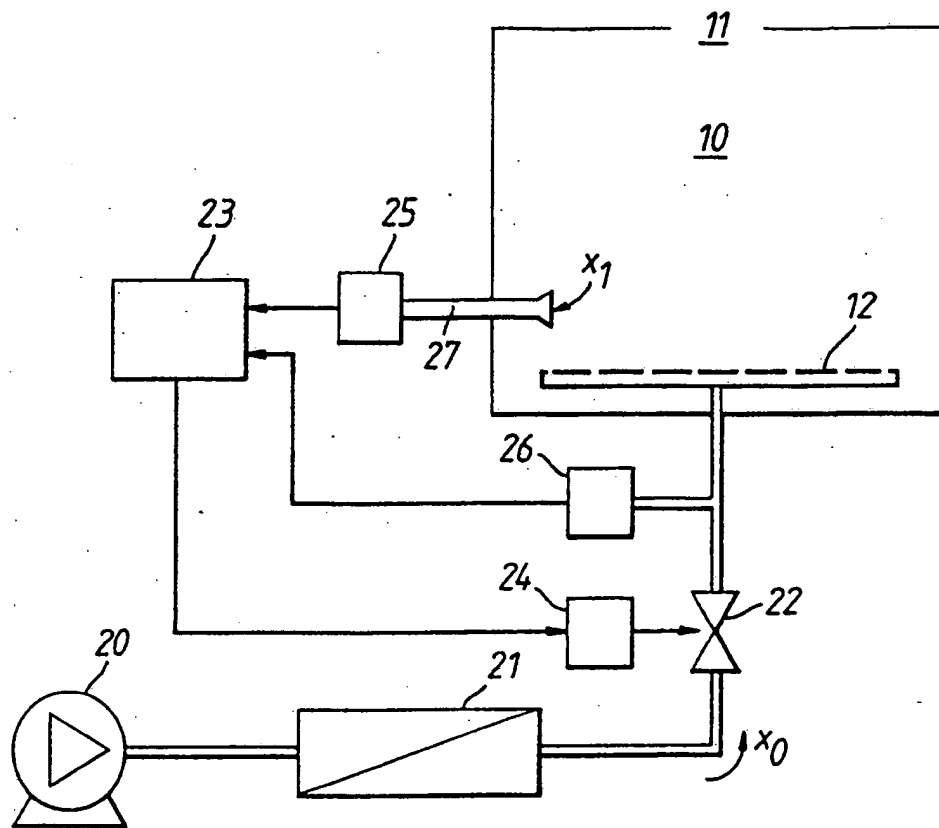
A. CLASSIFICATION OF SUBJECT MATTER

IPC5: B65D 90/44

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC5: A23B, A23L, B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DIALOG

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO, A1, 9111913 (THE BROKEN HILL PROPRIETARY COMPANY LIMITED), 22 August 1991 (22.08.91), page 9, line 34 – page 10, line 16, claims 4-10	1-15
A	US, A, 4317797 (SMITH), 2 March 1982 (02.03.82)	1-15

☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
14 May 1993	

Name and mailing address of the ISA/	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL-2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl. Fax: (+31-70) 340-3016	Björn Salén

Form PCT/ISA/210 (second sheet) (July 1992)

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A1- 9111913	22/08/91	NONE	
US-A- 4317797	02/03/82	NONE	